### Approved For Release 2001/08/13: CIA-RDP78B04747A001800070021-3

16 May 1962

### Shelving Required

All shelving to be delivered and erected in various rocus of in accordance with installation drawings to be furnished.

Delivery Date BOD

Suggested Vendors:

STATINTL

NOTE: Low bidder on shelving now used in Map Library which has been entirely satisfactory. Item MC-1 should match shelving supplied.

STATINTL

# **DECLASS REVIEW by NIMA/DOD**

STATINTL

### Approved For Release 2001/08/13 : CIA-RDP78B04747A001800070021-3

#### DED/NPIC-369-62 Page two

Total

Item No.	Quantity	Item Description	Estimated Price/Unit
159	<b>3</b>	Shelving, Open, 6 shelves, gray each unit 48"w x 48"d x 75"h	S
160	21	Shelving, Open, 6 shelves, gray each unit 48"w x 36"d x 75"h	
16)	Į.	Shelving, Open, 6 shelves, gray each unit 36"w x 36"d x75"h	
<b>SB-1</b>	<b>₽</b> 62	each unit 36"w x 12"d x 75"h erected in21 Racks double faced, Type E, Class 3, each face to be 33 feet long made up of one initial and 10 add; tional units; each unit to have eight shelves openings) spaced as follows: Top opening on 6 inch center, bottom six openings on 13 inch center and base strips.  Stock No 26-S-32857-130;	1- (7 iters .
	396	Shelves, Library, 7 shelves and roll out shelf; 35% x 9% x 75% erected in 22 ranges consisting of 5 double-faced sections (10 single-faced sections) and 22 ranges consisting of 6 double-faced sections) and 22 ranges consisting of 6 double-faced sections (8 single-faced sections), each single faced section 7′, 3″ high by 9″ deep by 36″ widesees shelves (base shelf, top and 5 intermediate shelves; one of the intermediate shelves of each faced section shall be equiped with a sliding reshelf suspended from the underside of the intershelf by means of steel clips) on 14″ centers; shall be of bolt and nut construction easily and quickly assembled and adjustable to appropriate heights without the use of special tools; shelves shall be commercial heavy duty grade of steel of tion, smoothly finished, properly prepared and with an appropriate, durable gray enamel; shelves shall be appropriately braced, shall include chends, bases and common backs, intermediate ends sections shall be open. Uprights shall be T ty and shelf edges shall be formed downward by the right angle bends, all of which shall present a finished, neat, and rugged unit. Shelving shall delivered knocked-down, complete in all respecting all clips, side, back, and U-shaped steel t	ed  e with  te  h single- ference  mediate  shelving  d  chelf  ing  onstruc- painted  ing  osed  of  pe and  ec

## Approved For Release 2001/08/13 : CIA-RDP78B04747A001800070021-3

IMD/NPIC-369-62 Page three


Item No.	Quantity	Item Description	Estimated Price/Unit	Total
		components and all hardware appropriate to completely erect it in a structually sound, workman-like menner. Errection of shelving on site shall be accomplished by the vendor and all costs involved therein shall be a part of the purchase price.		STATINTL
R-1	3	Shelves, Ledge type A closed, 9 shelves 36"v x 24"d below ledge, 12"d above ledge 75"h.		
	STATINTL	elass III reenforcing, 3 units with doors.  #26-5-32327-156 or equivalent		
R-2	<b>2</b> 5	Shelves, Type A closed, 9 shelves 36"w x 24"d x 75"h Class III reenforcing,		
	STATINTL	#26-5-32852-258		
SB-2	3,192	Shelf inserts, horizontal (per attached sketch)		
	15,960	Shelf insets, vertical (per attatched shetch)		
			TOTAL	

Distribution:

0 & 4 - Logistics

ILLEGIB Approved For Release 2001/08/13 : CIA-RDP78B04747A001800070021-3

Approved For Release 2001/08/13: CIA-RDP78B04747A001800070021-3

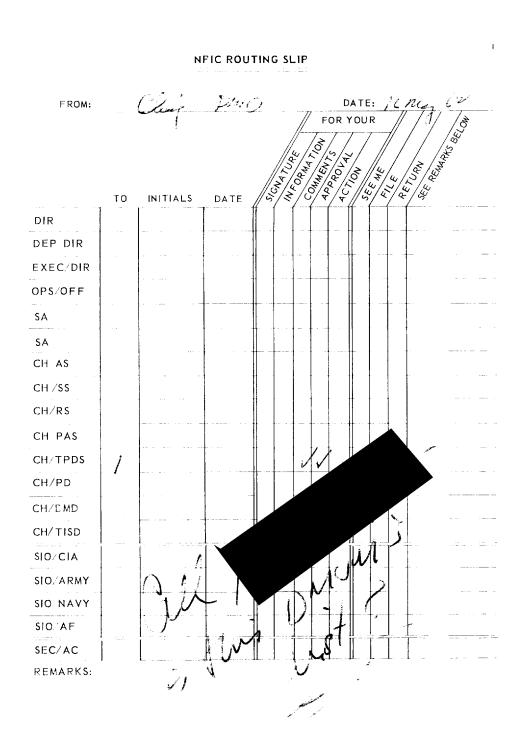

STATINTL